


KW Weighing Indicator

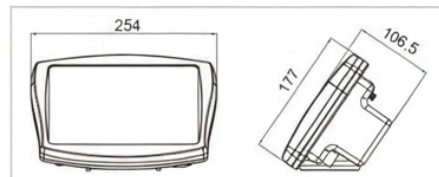

Features

Full function: unit change, accumulation, checkweighing, simply counting.

Weighing with tolerance range (check-weighing): a visual and audible signal helps with portioning, dispensing or grading

Hold function: When the weighing conditions are unstable, a stable weight is calculated determining an average value

RS-232 interface can connect to PC or printer.

Technical Data

Display: LCD display, digit height 24mm with white color LED backlight

Power: AC adapter (100~240VAC/12V500mA), rechargeable battery (lead acid battery 6V/4Ah), operation time 50 hours

Accessories

- Connection parts to install on pole for platform scale
- RS-232 cable for PC
- RS-232 cable for printer
- Mini printer
- Label printer
- 3 color light tower

Standard



Factory Option



Model	KW
Housing	ABS plastic
Dimensions	254x177x106 mm
Net weight	1.5kg
nmax.	7.500e
Load cell input resistance	43~1600 ohms
Load cell excitation voltage	5VDC
Vmin(only for approval)	0.5uV
Cable length	461m/mm ²
Load cell connector	Air connector, 7pin for EC type approved model.